


DDJ-WeGO2

Hardware Diagram for rekordbox dj

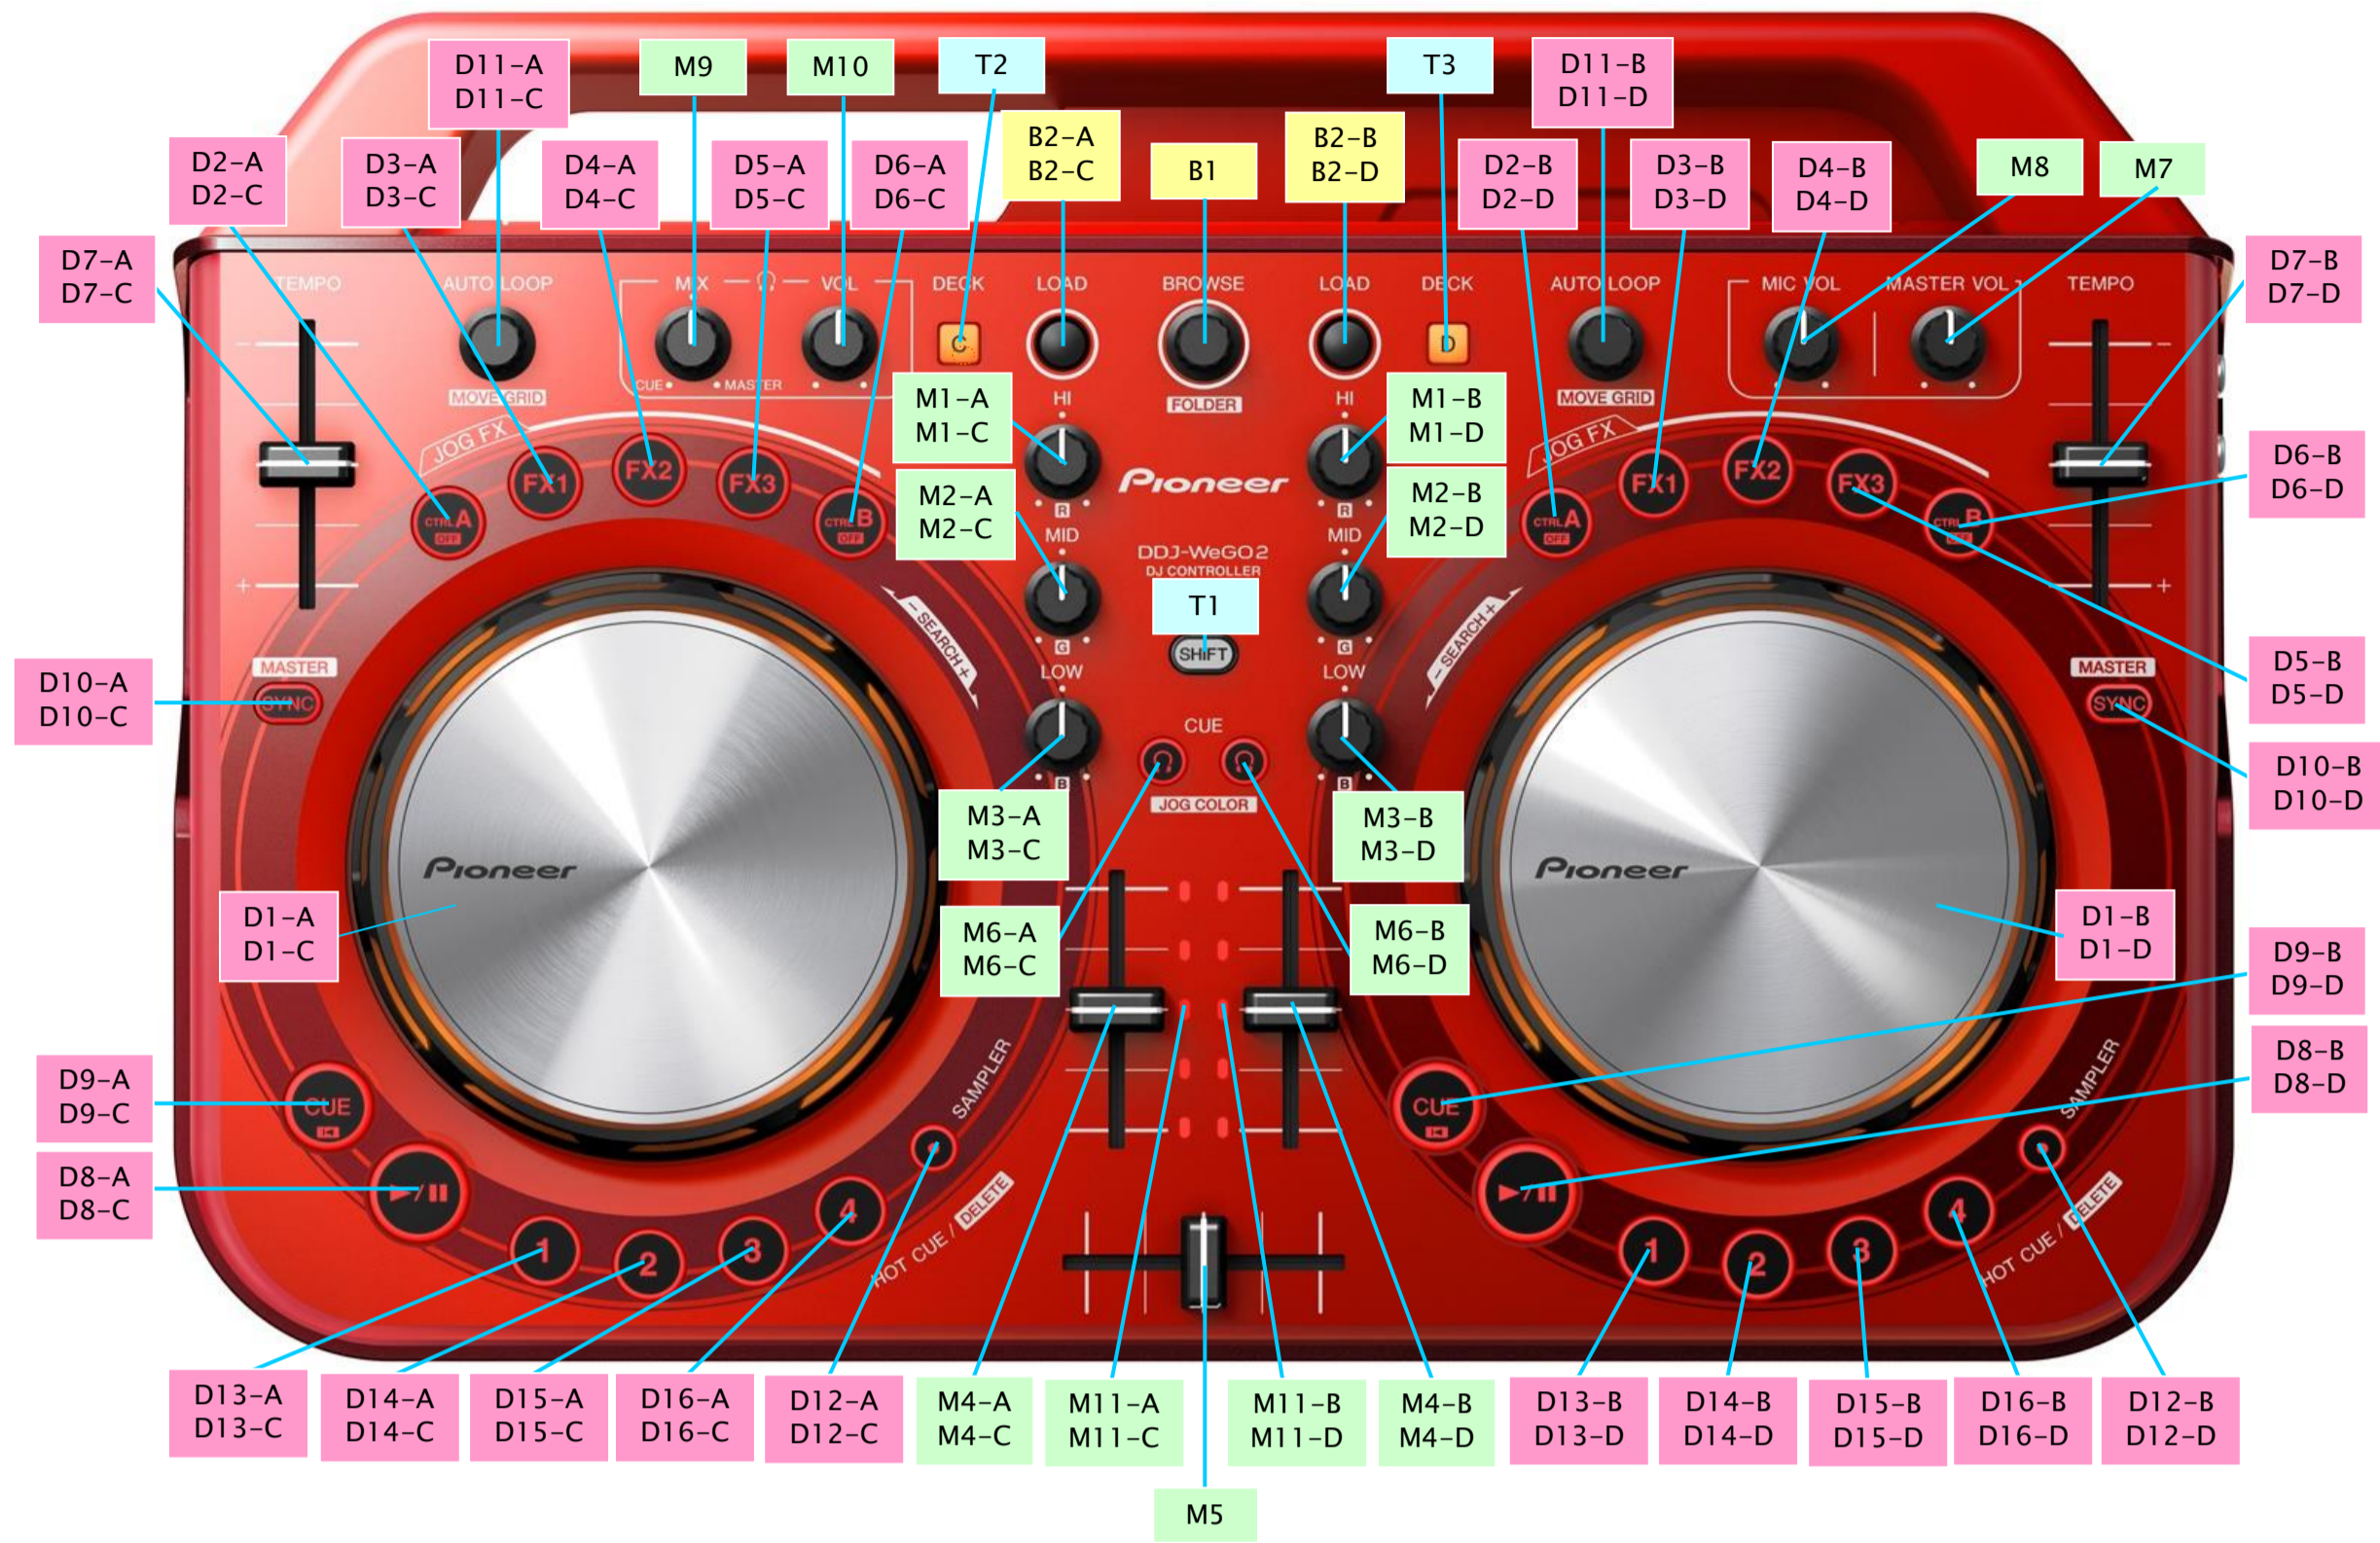

Group	No.	Name	Operation	Function	(+SHIFT)	
Browse	B1	BROWSE	Turn	Browse(files/folders/items)	Waveform Zoom In/Out	
	B2	LOAD	Press	Open folder/Scroll layer	Close folder/Scroll layer	
Mixer	M1	HI	Turn	EQ (High)	Adjust luminance of red LED on 4 sides of the JOG	
	M2	MID	Turn	EQ (Mid)	Adjust luminance of green LED on 4 sides of the JOG	
	M3	LOW	Turn	EQ (Low)	Adjust luminance of blue LED on 4 sides of the JOG	
	M4	CH FADER	Move the slider	Channel fader	-	
	M5	CROSS FADER	Move the slider	Cross fader	-	
	M6	CUE	Press	Headphones monitor on/off	Change colors of LED on 4 sides of the JOG	
	M7	MASTER VOL	Turn	Master out level	Master out level	
	M8	MIC VOL	Turn	MIC input level	MIC input level	
	M9	MIX	Turn	HEADPHONES MIX	HEADPHONES MIX	
	M10	HEADPHONES VOL	Turn	HEADPHONES LEVEL	HEADPHONES LEVEL	
	M11	CH INPUT LEVEL METER	-	Channel Input Level Indicator	-	
Deck	D1	JOG	Top of jog	Turn	Scratch	Seek
		Side of jog	Turn	Pitch bend	Pitch bend	
		Top of jog	CTRL A / FX1 / FX2	Turn	Adjust Parameter	
		Side of jog	/ FX3 / CTRL B	Turn	Adjust Parameter	
	D2	CTRL A	Press	FILTER	All JOGFX Mode is off	
	D3	FX1	Press	JOGFX FX1 Mode on	Select Effect1	
	D4	FX2	Press	JOGFX FX2 Mode on	Select Effect2	
	D5	FX3	Press	JOGFX FX3 Mode on	Select Effect3	
	D6	CTRL B	Press	Select Beats	All JOGFX Mode is off	
	D7	TEMPO	Move the slider	TEMPO control	-	
	D8	PLAY/PAUSE	Press	PLAY/PAUSE	-	
	D9	CUE	Press	Set Cue/Play, Back Cue	Jump to track start	
	D10	SYNC	Press	SYNC On/Off	Master	
D11	AUTO LOOP	Turn	Loop Size Select	Loop Move		
		LOOP OFF	Press	Auto Loop On	Reloop	
		LOOP ON	Press	Loop Off	Loop Off	
		Press	Sampler Mode ON/OFF	-		
D12	SAMPLER	Press	Sampler Mode ON/OFF	-		
D13	HOT CUE 1	SAMPLER 1	Press	Hot Cue Point 1	Delete Hot Cue Point 1	
		SAMPLER Mode	Press	Sampler 1 Play	Sampler 1 Stop / (Slot is Empty) Load from List	
D14	HOT CUE 2	SAMPLER 2	Press	Hot Cue Point 2	Delete Hot Cue Point 2	
		SAMPLER Mode	Press	Sampler 2 Play	Sampler 2 Stop / (Slot is Empty) Load from List	
D15	HOT CUE 3	SAMPLER 3	Press	Hot Cue Point 3	Delete Hot Cue Point 3	
		SAMPLER Mode	Press	Sampler 3 Play	Sampler 3 Stop / (Slot is Empty) Load from List	
D16	HOT CUE 4	SAMPLER 4	Press	Hot Cue Point 4	Delete Hot Cue Point 4	
		SAMPLER Mode	Press	Sampler 4 Play	Sampler 4 Stop / (Slot is Empty) Load from List	
Others	T1	SHIFT	Press	Shift	-	
	T2	DECK C	Press	Switch Deck A and Deck C	-	
	T3	DECK D	Press	Switch Deck B and Deck D	-	